


Classic Carder

Instructions to adjust the drum

Remove the belt from the pulleys.

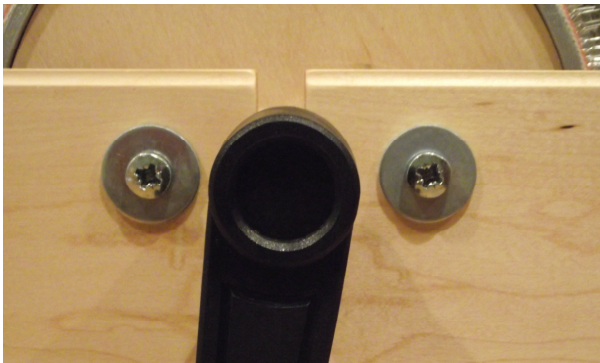

With a large Phillips screwdriver loosen the M6 machine screws on both sides of the carder frame.

Adjust the drum to the correct position - when the pins are 0-2mm apart (occasionally touching when drums are turned).

Tighten the screws.

Replace the belt.

